
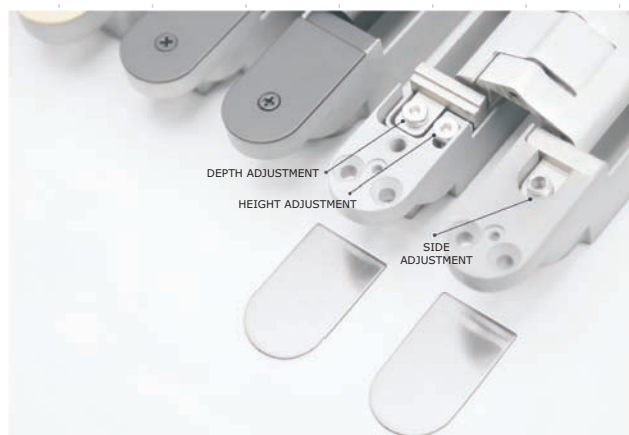




3D160/3D200

Features

- Completely concealed for unrebated doors with timber, steel and aluminium frames
- Cycle tested: 200,000
- Right hand and left hand applicable
- Three-dimensionally adjustable
- Opening angle 180 degrees
- Pre-cut intumescent hinge pads available

Ref. No.	Size	Load Capacity
• 3D160	28 x 160mm	80kg.
Minimum door thickness required: 36mm		
2 Pcs. for door width upto 900mm		
3 Pcs. for door width upto 1000mm		

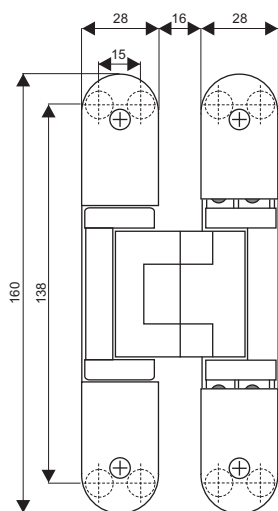

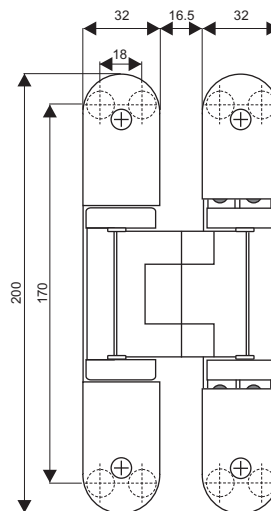Ref. No.	Size	Load Capacity
• 3D200	32 x 200mm	120kg.
Minimum door thickness required: 40mm		
2 Pcs. for door width upto 1000mm		
3 Pcs. for door width upto 1150mm		



Finish: SSS, PSS, SB, PB, MAB, MBL

